


EXTERNAL ELEVATIONS

THE DOUBLE GLAZED UNITS ARE 32mm THK, INCORPORATE LOW 'E' COATINGS, WARM EDGE SPACER BARS AND ARGON FILLED CAVITIES TO ACHIEVE A CENTRE PANE 'U' VALUE OF 1.0W/m2K

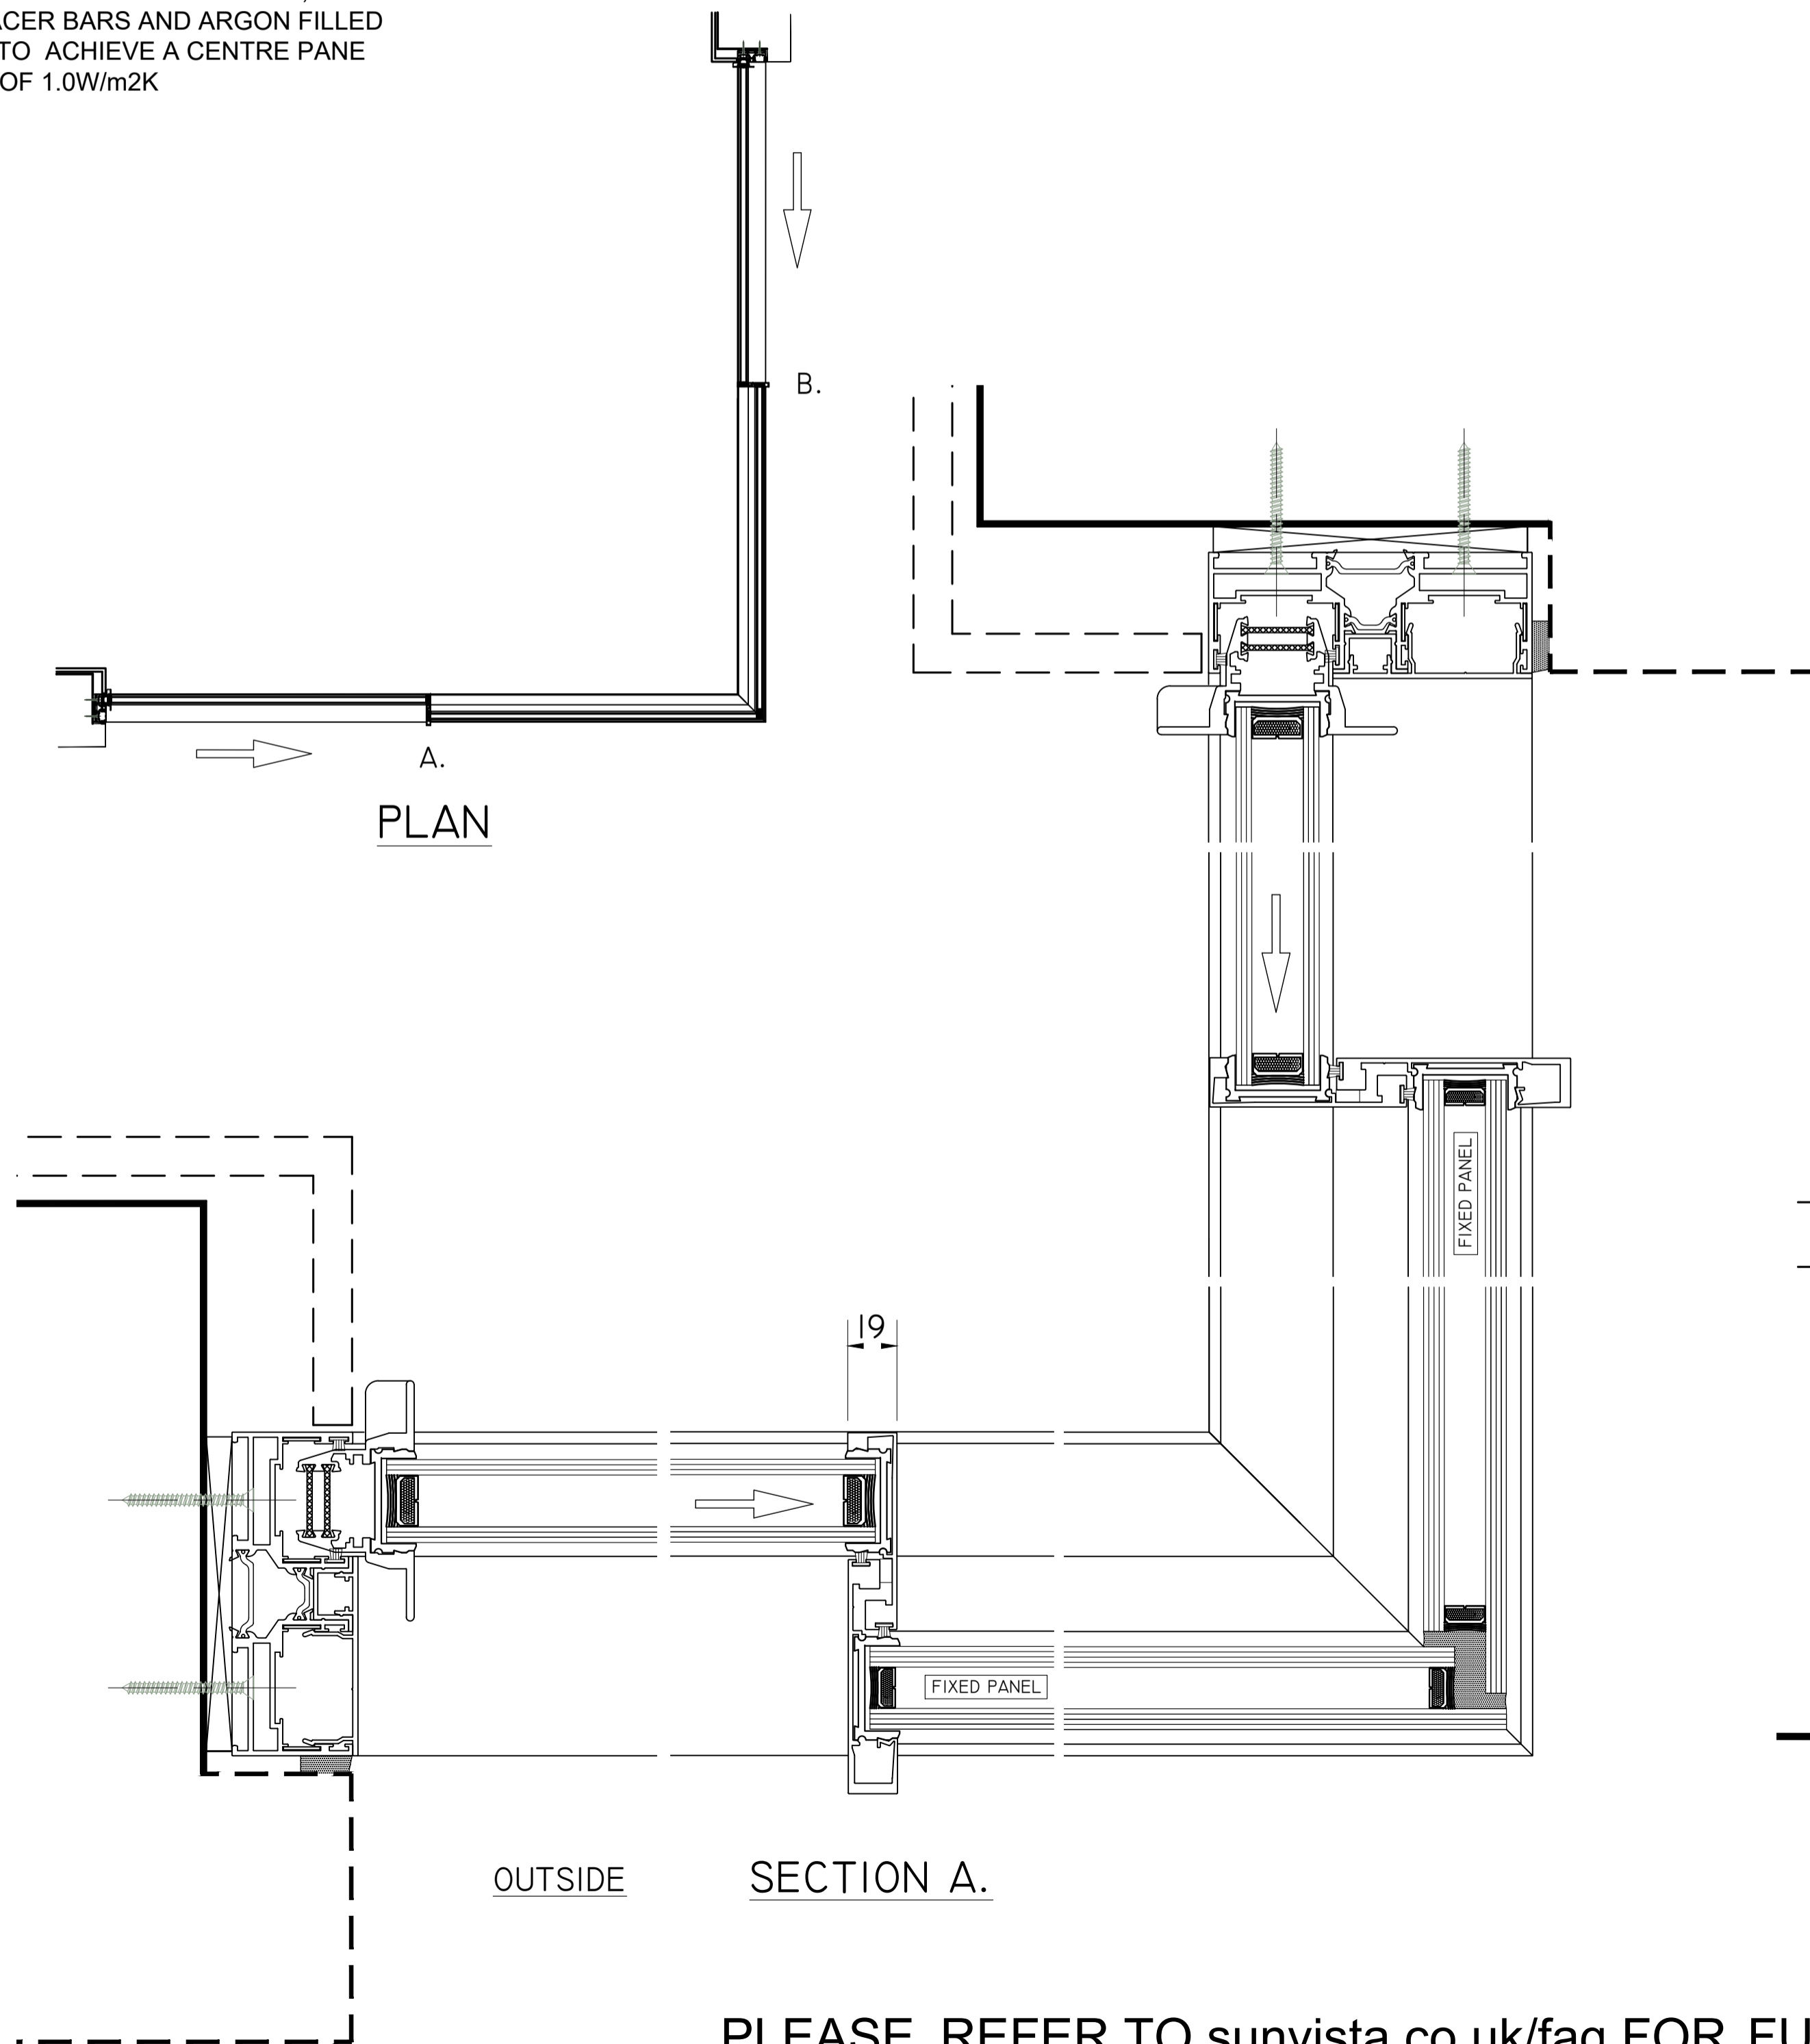


PLAN

SECTION A.

SECTION B.

SUNVISTA FRAMES CAN BE CONCEALED WITHIN THE STRUCTURE, BOTH INTERNALLY AND EXTERNALLY, AS INDICATED, OR THE THERMALLY BROKEN FRAMES CAN BE EXPOSED. CONCEALED TRICKLE VENTS CAN BE INCORPORATED IN BOTH SCENARIOS.

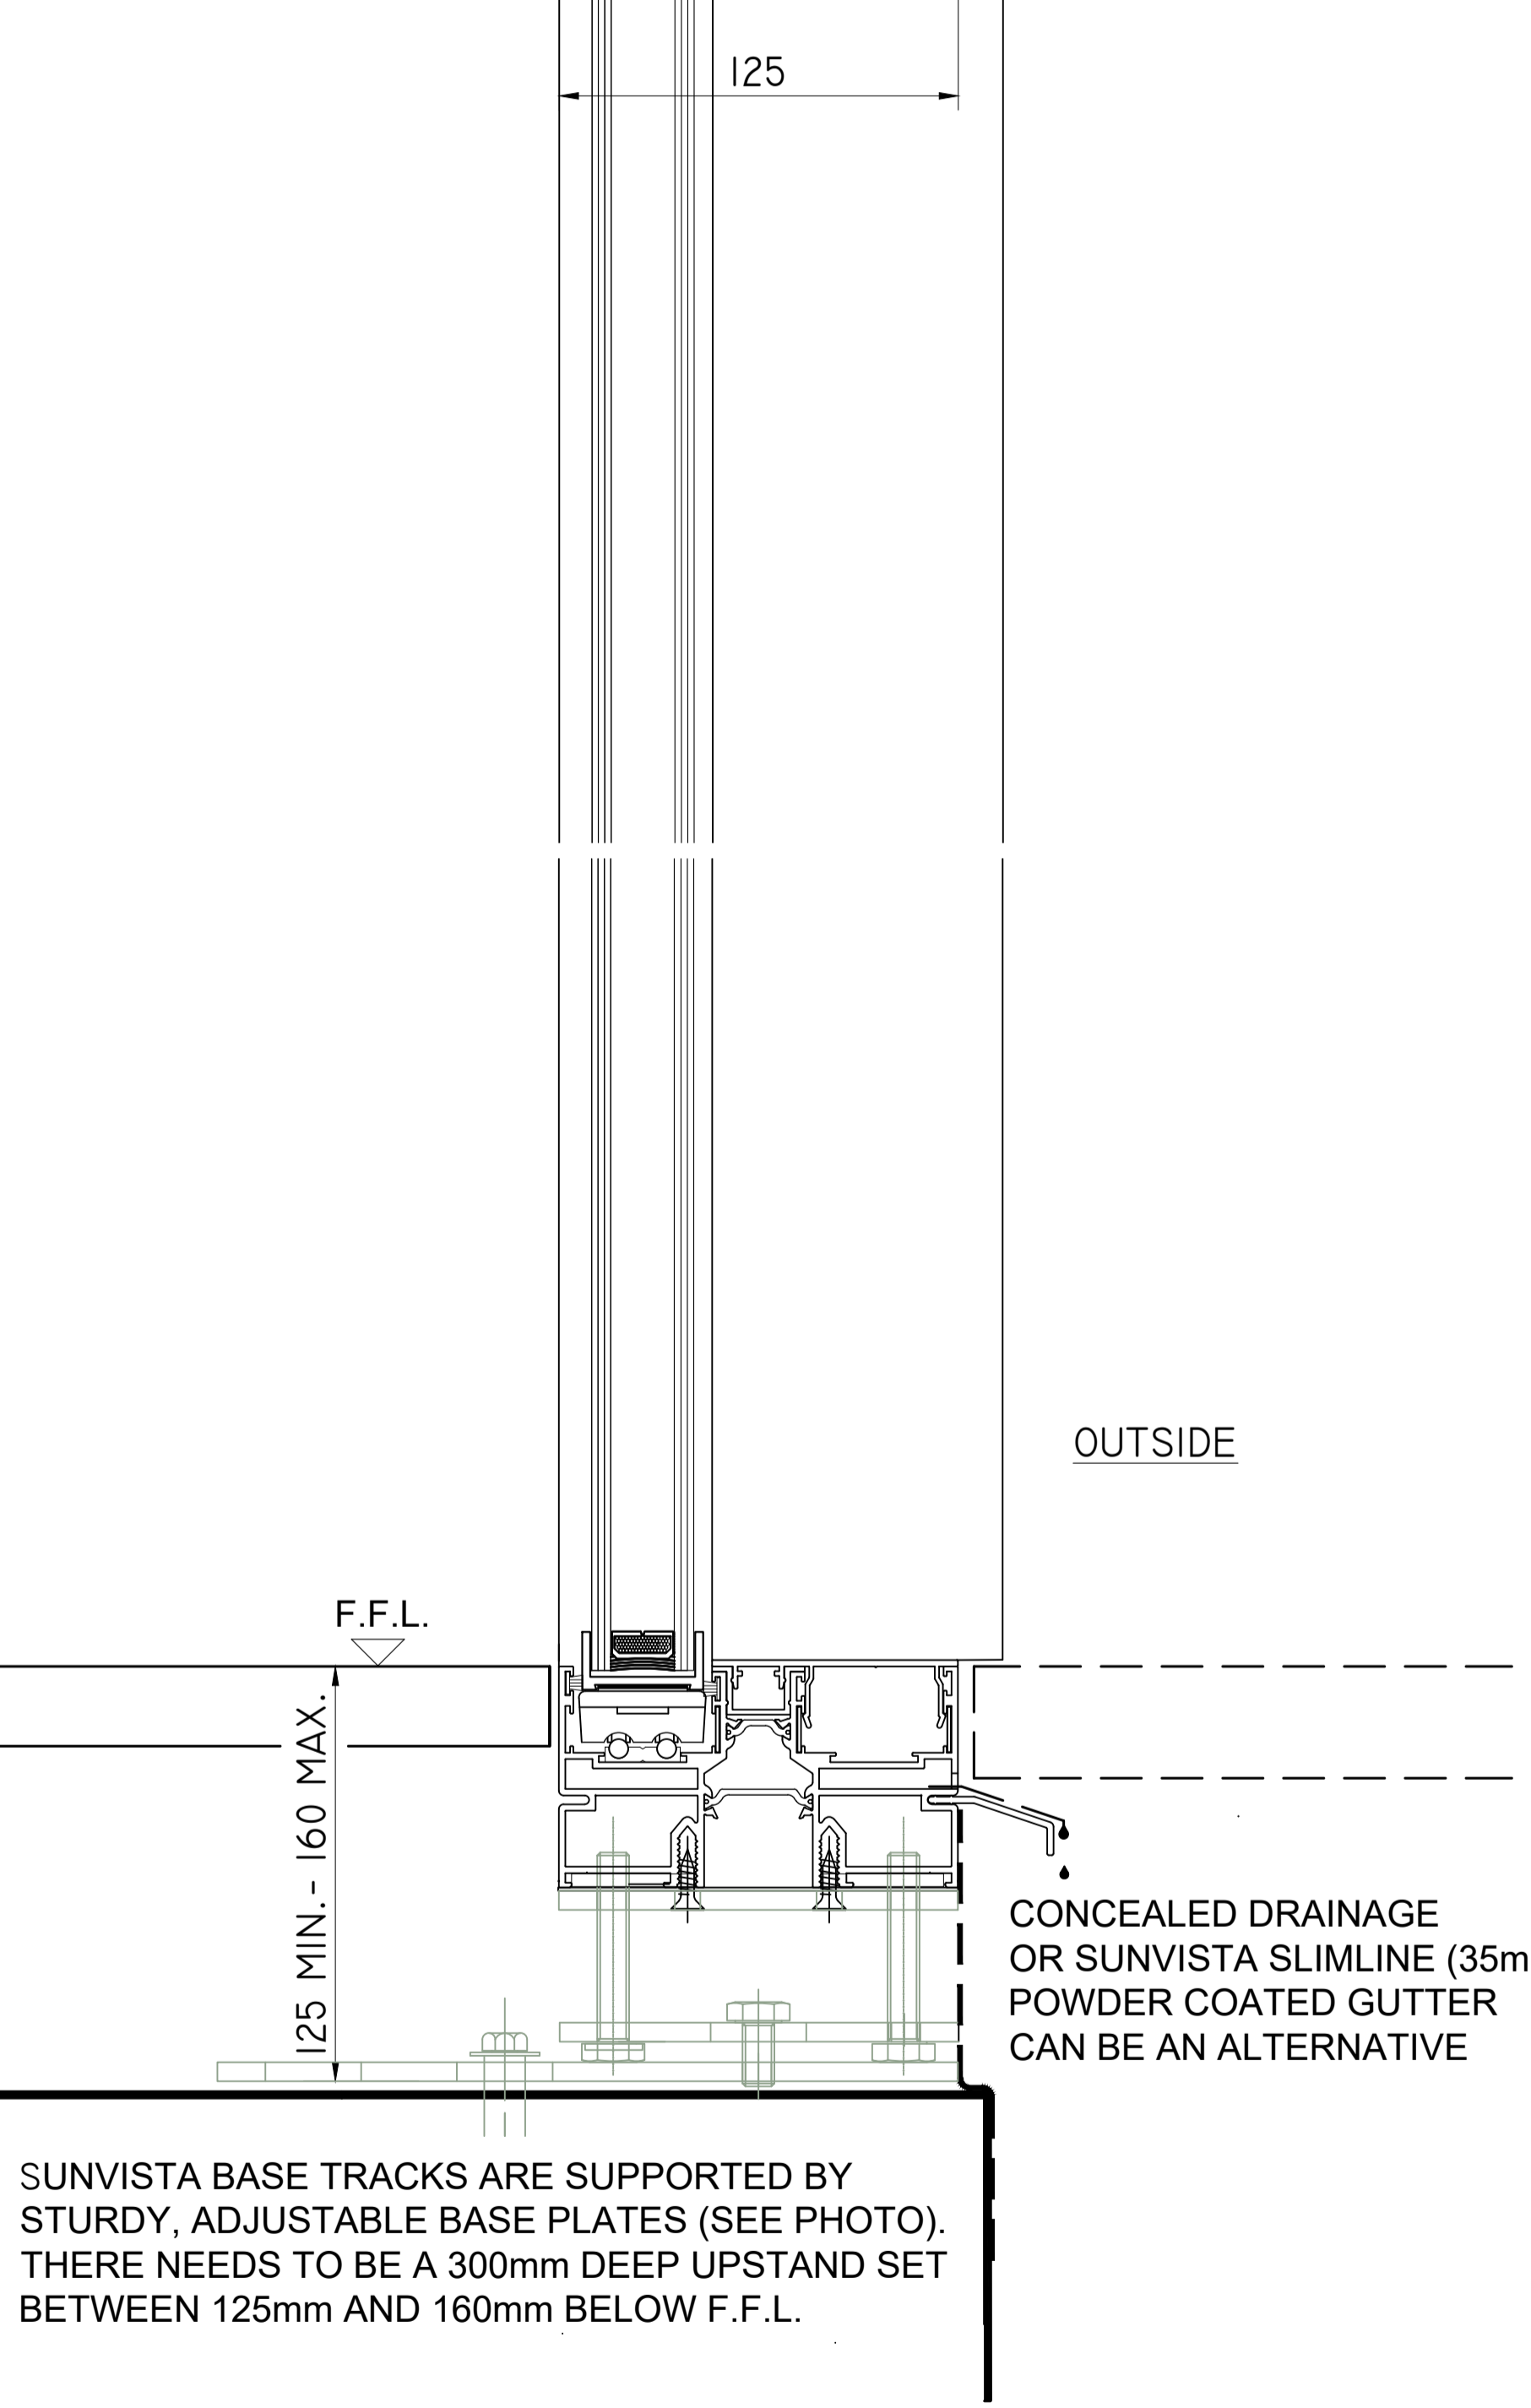


OUTSIDE

OUTSIDE

PLEASE REFER TO [sunvista.co.uk/faq](http://sunvista.co.uk/faq) FOR FURTHER INFORMATION

SOME TWO TRACK CONFIGURATION OPTIONS

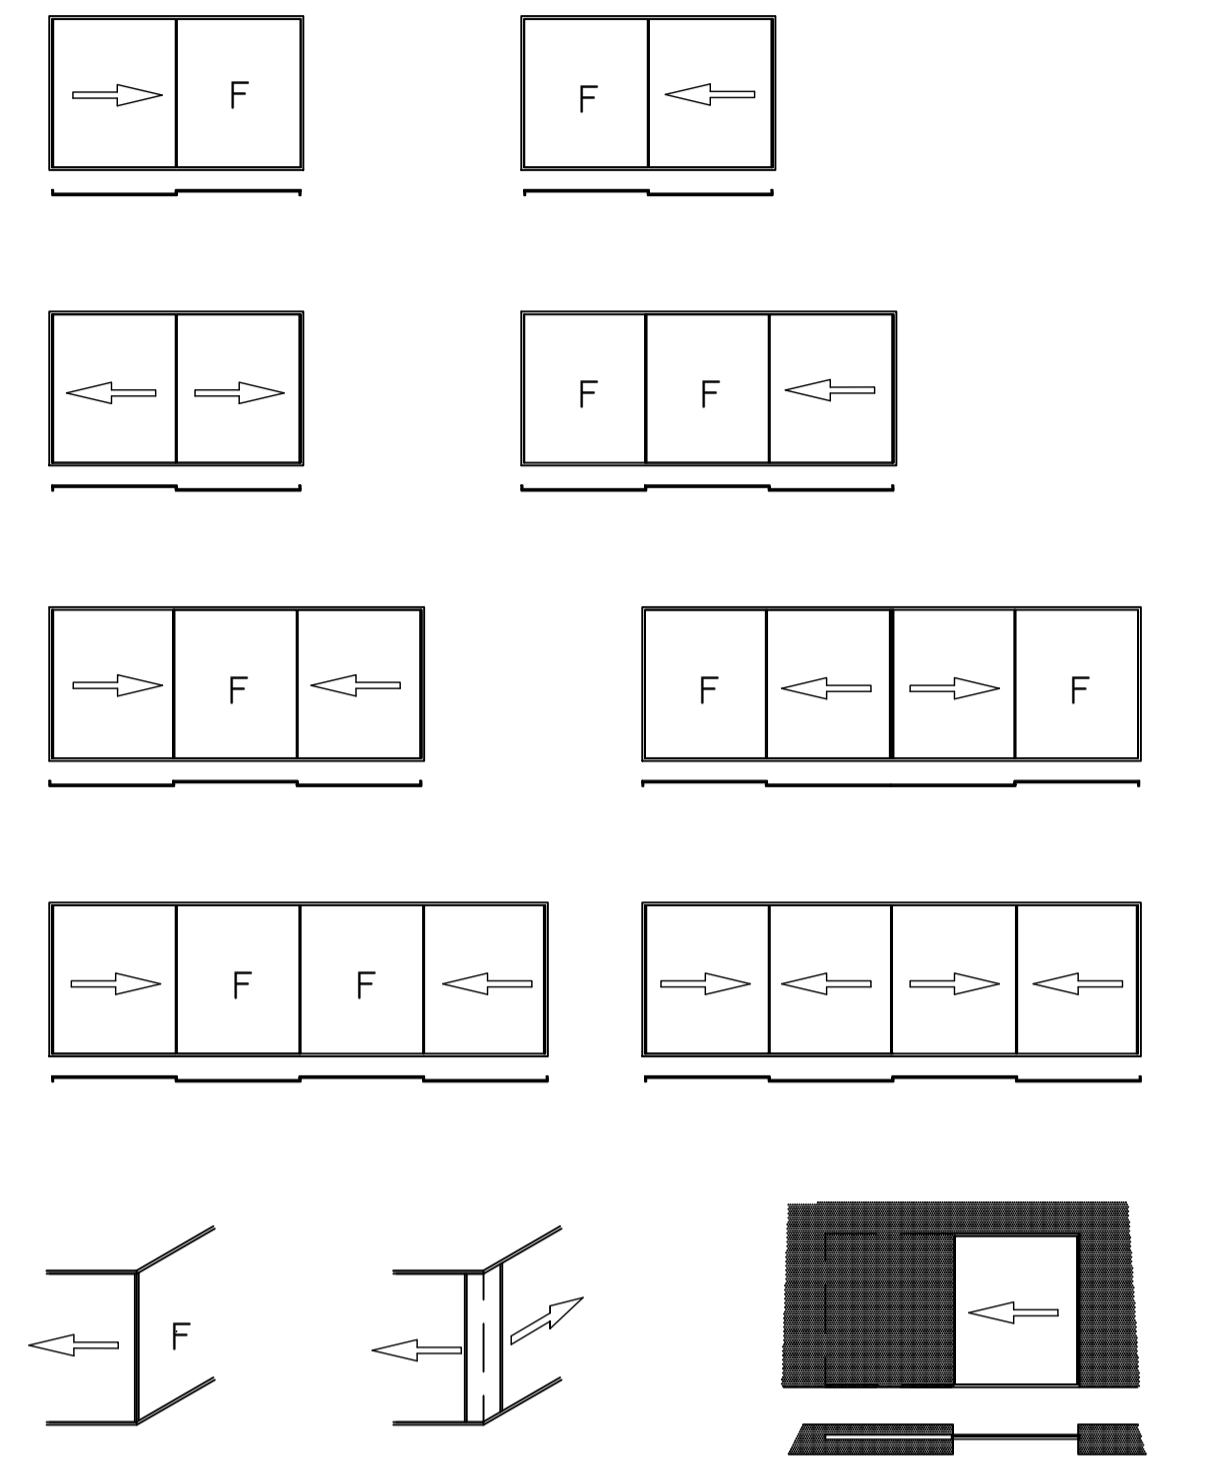

BASE PLATE IMAGE

PROJECT: TYPICAL DETAILS  
 DRAWING: SUNVISTA DOORS - 2 TRACK GLASS TO GLASS CORNER/2 SLIDE



SCALE:	DATE: 30/3/26	DRAWN: MJB	CHECKED:
DRAWING No.			REVISION: